



MODEL: DSFBF180K CARBONATION CHILLER

STANDARD FEATURES

- Dispenses chilled sparkling water, chilled still water and ambient still water
- Use with Fontemagna Bridge and Column Tap dispensers
- Compact design for under counter installation
- Professional stainless steel carbonator
- Water pressure and CO₂ regulator
- Elkay WaterSentry® Filter included Carbon Activated designed to reduce Aesthetic Chlorine, Taste and Odor
- Installation kit included

ACCESSORIES

Replacement Water Filter: Elkay WaterSentry® Filter WSF6000R-2PK (includes 2 water filters)

SPECIFICATIONS

Model Type	Under counter
Materials	Stainless steel
Cold Water Temperature Range	37°F - 50°F
Cooling Capacity	20 gallons/hour. (80 liters/hour.)
Cooling Technology	Stainless steel coils
Refrigerant Gas	R134a
Condensation Control	Forced ventilation (fan)
Condensation Control Inlet Water Line	Forced ventilation (fan) 3/8 inch, PE plastic tubing
	. ,
Inlet Water Line	3/8 inch, PE plastic tubing
Inlet Water Line Electrical	3/8 inch, PE plastic tubing 115 V - 60 Hz 1 ph.

Item No:	Qty.
Model No:	
Project No:	
1	

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

PRODUCT COMPLIANCE

UL standard for safety of drinking water coolers ANSI/UL399

CSA standard for refrigeration equipment, CSA C22.2 No. 120

NSF Standard 42 for Aesthetic Chorine, Taste and Odor and Particulate Class 1 (Filter)



This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.


Elkay 2222 Camden Court Oak Brook, IL 60523 Phone: 800.416.4106

elkay.com © 2015 Elkay Manufacturing Company

SPEC00381 April2016 Page 1 of 2



MODEL: DSFBF180K CARBONATION CHILLER

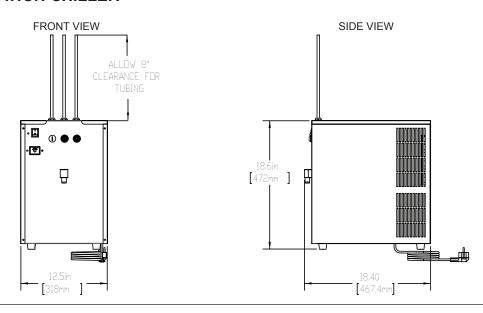

ELECTRICAL: 115 V -60 Hz. 1 Ph., 330 W - 3.2A, NEMA 5-15 Plug

WATER SUPPLY: 3/8 in. supply recommended, 14.5 PSI min, 51 PSI max. (125 PSI max with use of supplied regulator)

INSTALLATION: Provide 4 in. of clearance around unit to allow adequate ventilation

REQUIRES: CO_2 tank with standard threaded connection to CGA 320 nut, CO_2 TANK IS NOT INCLUDED

DIMENSIONS	Unit	Shipping
Height	26.6 (in.)	28.3 (in.)
Width	12.5 (in.)	16.5 (in.)
Depth	18.4 (in.)	23.2 (in.)
Weight	57 (lbs.)	66 (lbs.)

INSTALLATION KIT (INCLUDED)

- · Installation and operating instructions
- · CO, Regulator
- · Water Pressure Regulator
- · Elkay WaterSentry® Filter and Mounting Bracket
- · Additional tubing for connection to water and CO,
- · Required fittings, including 3/8 push to connect or 3/8 tube connection to water supply
- Shut-off Valve

Item No:	Qty
Model No:	
Project No:	

Elkay 2222 Camden Court Oak Brook, IL 60523 Phone: 800.416.4106 elkay.com © 2015 Elkay Manufacturing Company